

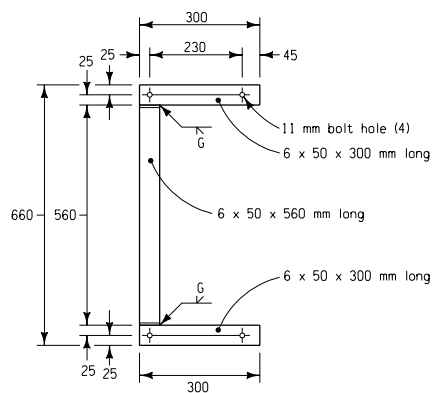
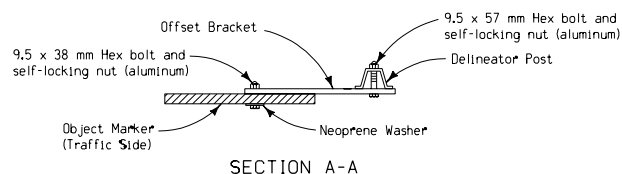


TYPE 3 OBJECT MARKER

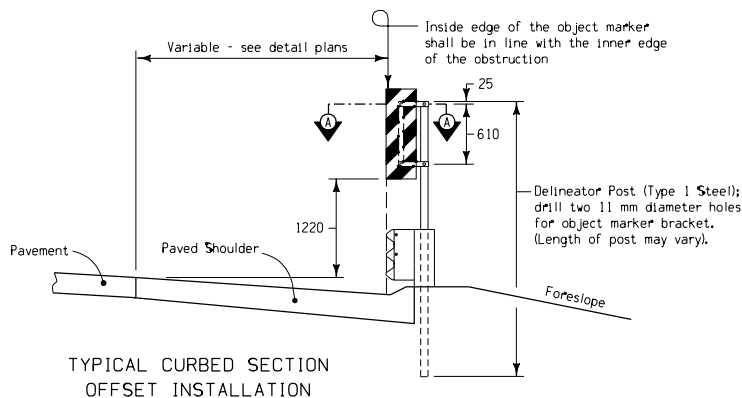

DETAIL OF
OFFSET BRACKET

Offset bracket shall be galvanized
in compliance with AASHTO M 111

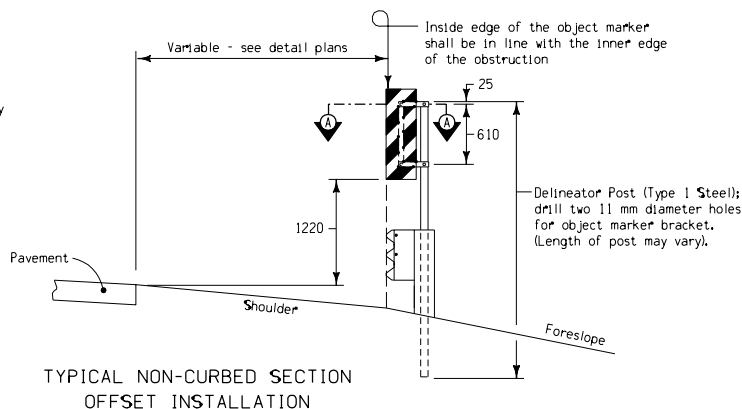

GENERAL NOTES:

Marker shall be fabricated in conformance with current specifications for signing materials (sign panels) – face of marker shall be covered with yellow reflectorized sheeting to which black diagonal strips are to be applied using silk-screening ink.

Materials and methods of construction shall be in accordance with current Standard and Supplemental Specifications.


Post required for marker shall be Type 1, as specified by the Standard Specifications. The post length shall be sufficient to provide a minimum 770 millimeters of embedment when installed at the specified mounting height.

When object markers are required with guardrail installations, the object markers will be included in the price bid for installation of guardrail. When object markers are required when no guard-rail work is done the object markers will be bid.

The price bid for "Type 3 Object Marker" shall be considered full compensation for furnishing, assembling and installing as detailed on this sheet.

List of materials for the Type 3 Object Marker:

- Object Marker (OM-3L or OM-3R)
- Delineator Post (Length may vary)
- Offset Bracket as detailed herein
- (2) 9.5 mm x 38 mm long aluminum bolts
- (2) 9.5 mm x 57 mm long aluminum bolts
- (4) 9.5 mm aluminum hex self-locking nuts
- (2) Neoprene washers

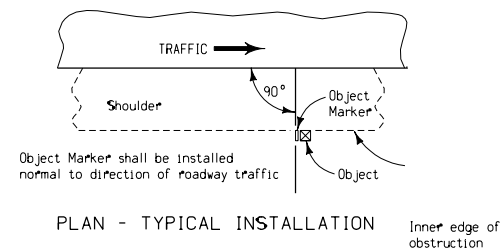

All dimensions given in millimeters unless noted.

METRIC VERSION	Iowa Department of Transportation Highway Division		
	STANDARD ROAD PLAN		RE-47
	REVISION: Revised Standard Notes for object marker, they will be included in price bid for guardrail installation.		REVISION NO. 12
	APPROVED BY: DESIGN METHOD ENGINEER		REVISION DATE 04-03-01
	DETAILS OF TYPE 3 OBJECT MARKER		